



KINGSTON INDUSTRIAL RTV (GP) 199

Features

- 100% UV Resistant.
- Waterproof ideal for interiors & exteriors.
- Remains Elastic Forever.
- Short Tack Free Time.

Technical Parameters

- Nature: Acetic
- Tooling Time: 5-7 min
- Temp Resistance: -50 to 120
- Cure Rate: 2mm / 24hrs



PACK AVAILABLE IN

- 260 ML Bottle



COLOR AVAILABLE IN

- Black • White • Clear



KINGSTON INDUSTRIAL RTV (GP PLUS) 211

Features

- 100% UV Resistant.
- Waterproof ideal for interiors & exteriors.
- Remains Elastic Forever.
- Short Tack Free Time.

Technical Parameters

- Nature: Acetic
- Tooling Time: 6-8 min
- Temp Resistance: -50 to 120
- Cure Rate: 2mm / 24hrs



PACK AVAILABLE IN

- 260 ML Bottle



COLOR AVAILABLE IN

- Black • White • Clear



KINGSTON INDUSTRIAL RTV (GP PRO) 221

Features

- Good Weather Resistance.
- Wide Temperature Applicability.
- Excellent Adhesion.
- 100% UV Resistant.

Technical Parameters

- Nature: Acetic
- Tooling Time: 6-10 min
- Temp Resistance: -50 to 120
- Cure Rate: 2mm / 24hrs



PACK AVAILABLE IN

- 280 ML Bottle



COLOR AVAILABLE IN

- Black • White • Clear



KINGSTON DOORS & WINDOWS SEALANT (DS) 281

Features

- Paintable Post Application.
- Crack & Gap Filler.
- Interior Application.
- High Durability.

Technical Parameters

- Nature: Neutral
- Tooling Time: 15-20 min
- Temp Resistance: -20 to 80
- Cure Rate: 2mm / 24hrs



PACK AVAILABLE IN

- 270 ML Bottle



COLOR AVAILABLE IN

- White • Customized



KINGSTON ACRYLIC PAINTABLE (AP) 291

Features

- Crack & Gap Filler.
- Paintable Sealant.
- Non Sagging & Durable.
- Interior Application.

Technical Parameters

- Nature: Neutral
- Tooling Time: 15-20 min
- Temp Resistance: -20 to 80
- Cure Rate: 2mm / 24hrs



PACK AVAILABLE IN

- 450 GM Bottle



COLOR AVAILABLE IN

- White • Customized



KINGSTON PERIMETER SEALANT (PS) 295

Features

- Paintable & Flexible.
- No Smell/ Non-Sagging.
- Ideal for Exterior Weather Conditions.
- Doors & Windows Filler.

Technical Parameters

- Tooling Time: 12-20 min
- Temp Resistance: -20 to 80
- Cure Rate: 2mm / 24hrs



PACK AVAILABLE IN

- 280 ML Bottle • 600 ML Sausage



COLOR AVAILABLE IN

- Black • White • Dark Brown



KINGSTON PERIMETER SEALANT (PS PLUS) 299

Features

- Highly Flexible.
- No Smell/ Non-Sagging.
- Ideal for Indian Weather Conditions.
- Doors & Windows Filler.

Technical Parameters

- Tooling Time: 12-20 min
- Temp Resistance: -20 to 80
- Cure Rate: 2.5mm / 24hrs



PACK AVAILABLE IN

- 280 ML Bottle • 600 ML Sausage



COLOR AVAILABLE IN

- Black • White • Brown



KINGSTON FENESTRA PRO (FS) 300

Features

- Specially designed for door & window professionals.
- Ideal for fenestration Industry.
- Rain Water Test Pass.

Technical Parameters

- Tooling Time: 10-20 min
- Temp Resistance: -20 to 80
- Cure Rate: 3mm / 24hrs



PACK AVAILABLE IN

- 280 ML Bottle • 600 ML Sausage



COLOR AVAILABLE IN

- Black • White • Brown • Dark Grey
- Light Grey



KINGSTON WEATHER NEUTRAL (WN +) 399

Features

- Suitable for exterior application.
- High adhesion on aluminium & glass.
- Excellent UV & Moisture Resistance.
- Odorless Neutral Silicone Sealant.

Technical Parameters

- Nature: Neutral
- Tooling Time: 10-12 min
- Temp Resistance: -50 to 120
- Cure Rate: 2mm / 24hrs



PACK AVAILABLE IN

- 280 ML Bottle • 600 ML Sausage



COLOR AVAILABLE IN

- Black • White • Clear • Dark Grey



KINGSTON MIRROR FIX (MF) 555

Features

- Corrosion Free.
- Non- Reactive to Mirror Coating.
- Suitable For Mirror Bonding.
- High UV Resistance.

Technical Parameters

- Tooling Time: 8-10 min
- Temp Resistance: -25 to 100
- Cure Rate: 2mm / 24hrs



PACK AVAILABLE IN

- 300 ML Bottle



COLOR AVAILABLE IN

- Clear



KINGSTON WEATHERPROOF (WS) 0789

Features

- Excellent UV Resistance & Ideal for all weather conditions.
- Weather seal in curtain wall & facade applications.
- Corrosion Free.
- Excellent adhesion on building substrates.

Technical Parameters

- Nature: Neutral
- Tooling Time: 20-30 min
- Temp Resistance: -50 to 120
- Cure Rate: 2mm / 24hrs



PACK AVAILABLE IN

- 300 ML Bottle • 600 ML Sausage



COLOR AVAILABLE IN

- Black • White • Clear • Dark Brown
- Steel Grey



KINGSTON X-ALL ULTRA 999

Features

- High Tack.
- Paintable.
- Excellent load bearing capacity.

Technical Parameters

- Tooling Time: 6-8 min
- Temp Resistance: -15 to 100
- Cure Rate: 2mm / 24hrs



PACK AVAILABLE IN

- 280 ML Bottle • 600 ML Sausage



COLOR AVAILABLE IN

- White • Crystal Clear



KINGSTON WINDSHIELD EXPERT 5000

Features

- One Component Polyurethane Sealant, Primerless Application.
- Ideal For Automotive & Bus Body
- ARAI Tested & Approved.
- Suitable For All Type Glass To Metal.

Technical Parameters

- Tooling Time: 15-25 min
- Temp Resistance: -50 to 100
- Cure Rate: 2.5mm / 24hrs



PACK AVAILABLE IN

- 300 ML Bottle



COLOR AVAILABLE IN

- Black



KINGSTON AUTO EXPERT 7000

Features

- Excellent Elasticity
- Excellent Primer less Bonding
- Excellent Extrusion & Thixotrophy

Technical Parameters

- Tooling Time: 10-20 min
- Temp Resistance: -50 to 120
- Cure Rate: 3mm / 24hrs



PACK AVAILABLE IN

- 310 ML Bottle



COLOR AVAILABLE IN

- Black



KINGSTON POLYURETHANE SEALANT 1000

Features

- Non Sagging & High Strength PU Sealant.
- Suitable For Bus Body Building Solutions / Panel Bonding.

Technical Parameters

- Tooling Time: 15-20 min
- Temp Resistance: -50 to 100
- Cure Rate: 2.5mm / 24hrs



PACK AVAILABLE IN

- 600 ML Sausage



COLOR AVAILABLE IN

- Black • White • Grey



KINGSTON BTR 5727

Features

- One Component Pu Sealant
- Primerless Application
- Ideal for Bus Body Building

Technical Parameters

- Tensile Strength: 3.5 Mpa
- Elongation: 350%
- Shore A: 50



PACK AVAILABLE IN

- 600 ML Sausage



COLOR AVAILABLE IN

- Black



KINGSTON POLYURETHANE SEALANT 6000

Features

- High Tack Windscreen PU Sealant.
- Suitable For All Type of LMV/HMV/Defence.
- Excellent Primerless Adhesion.
- Non Sagging.

Technical Parameters

- Tooling Time: 10-20 min
- Temp Resistance: -50 to 100
- Cure Rate: 2.5mm / 24hrs



PACK AVAILABLE IN

- 600 ML Sausage



COLOR AVAILABLE IN

- Black



KINGSTON OE 7000

Features

- Primerless Glazing Sealant.
- Recommended For Glass Bonding & Window Sealing In Bus, Trucks , Railways & Automotive Industries.
- Bubble Less Formulation For Smooth Finish.

Technical Parameters

- Tensile Strength: 5.5 Mpa
- Elongation: 400%
- Shore A: 60



PACK AVAILABLE IN

- 600 ML Sausage



COLOR AVAILABLE IN

- Black



KINGSTON ULTRASEAL 9999

Features

- Suitable For Joint Sealing Applications.
- Highly Elastic.
- Primerless Sealant.

Technical Parameters

- Tensile Strength: 1.3 Mpa
- Elongation: 600%
- Shore A: 33



PACK AVAILABLE IN

- 600 ML Sausage



COLOR AVAILABLE IN

- Black • White



KINGSTON PU FOAM 891

Features

- High Thermal & Acoustical Insulation.
- No Shrinkage, Waterproof.
- No Cracking, Paintable.
- Strong Bonding Expandable Foam.

Technical Parameters

- Curing Time: 30-35 Min
- Temp Resistance: -40 to 90
- Dust Free: After 25 Min



PACK AVAILABLE IN

- 750 ML Bottle



COLOR AVAILABLE IN

- Beige



KINGSTON PU FOAM 991 / 992

Features

- High Thermal & Acoustical Insulation.
- No Shrinkage, Waterproof.
- No Cracking, Paintable.
- Strong Bonding Expandable Foam.

- 991 - Straw
- 992 - Straw/ Gun (Dual)



PACK AVAILABLE IN

- 750 ML Bottle



COLOR AVAILABLE IN

- Beige

Technical Parameters

- Curing Time: 25-35 Min
- Temp Resistance: -40 to 90
- Dust Free: After 25 Min



KINGSTON B1 FIRE RETARDANT PU FOAM

Features

- Fire Resistant up to 4 hours, B1 Standard. (DIN 4102)
- Excellent Stability, Suitable For HVAC Application & Electrical Application.
- Good Adhesion on all surfaces (Except PE, PP & PTEE).
- High Acoustic & Thermal Insulation.

Technical Parameters

- Curing Time: 3 hrs/ 1.5 inch
- Temp Resistance: -20 to 100
- Dust Free: After 25 Mins



PACK AVAILABLE IN

- 750 ML Bottle



COLOR AVAILABLE IN

- Light Grey



KINGSTON NAIL BOND

Features

- High Strength Resin Based Construction Adhesive.
- Suitable for all type interior & designing application.
- Good Initial Grab.
- Suitable For Multi Weather Application.

Technical Parameters

- Tooling Time: 5-7 min
- Temp Resistance: 10 to 100
- Cure Rate: 2mm / 24hrs



PACK AVAILABLE IN

- 300 ML Bottle



COLOR AVAILABLE IN

- Beige



KINGSTON 1010/2K 2 PART ADHESIVE

Features

- Initial strength: 15 MPa within 8-10 minutes.
- Ideal for solar panel installation on metal rooftops.
- Exhibits exceptional durability, capable of withstanding extreme weather conditions.
- Provides an instant solution for welding multiple substrates such as ABS, FRP, ACP,
- Plastic, GI, MS, SS, aluminum, and other building materials.



PACK AVAILABLE IN

- 490ml (2 Part)



COLOR AVAILABLE IN

- Grey




KINGSTON PREMIUM GRADE TAPES

Masking Tape



GHB Tape



Butyl Tape



KINGSTON PU FOAM CLEANER



KINGSTON SEALANT APPLICATORS



Skeleton Gun



Standard Yellow



Heavy Red



Premium Heavy Blue




Aluminium Sausage Gun



Expanding Foam
Applicator

PAN INDIA PRESENCE

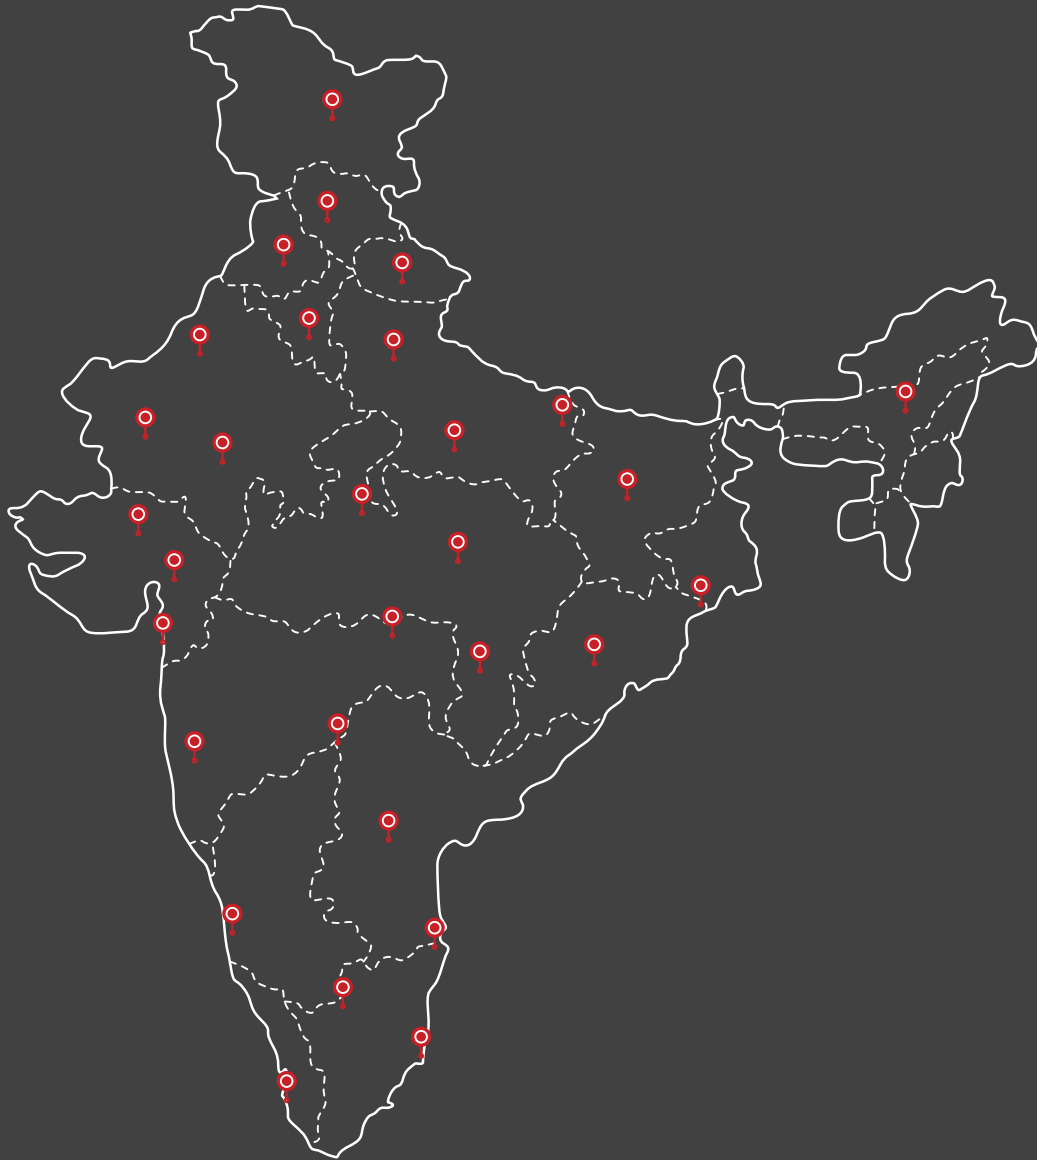


GET IN TOUCH

 011 - 47047914

 info@kingstonindia.in

 www.kingstonindia.in

 **Kingston Multi Products India Pvt. Ltd.**
805, 8th Floor, D-Mall,
Netaji Subhash Place, Delhi-110034



SCAN FOR MORE INFO